


Micro super-Rapid fittings for plastic tubes

Connections M3 - M5
Tube \varnothing 3




Suitable for nylon tubing

Micro Super-Rapid fittings are constructed in 14 different models.
Connection and disconnection of the tube, can be repeated several times and is performed with one hand only and without the use of tools. The sealing ring (O-Ring) can be easily replaced if it is damaged or should the rubber compound from which it is made wear with time.


Technical data	
material	brass OT58 nickel-plated
threads	M3 - M5
pressure	min. 0 - max. 16 bar (see tubes)
tube to connect	rilsan
	nylon 6 - 11 - 12
	polyethylene
	polyurethane
diameter	\varnothing 3 x 1.5
fluid	compressed air (for other types of fluid, contact our engineers)
temperature	-10°C + 60°C (see data for tubing used)

*with O-Ring assembled
#with Mod. 2661 assembled




Mod.	A	D	H	F	G	L	SW1
#6512 - 3 -	M3	2.5	5.8	5.3	10.2	1.5	
*6512 - 3 -	M5	2.5	5.8	5.8	10	2	

*with O-Ring assembled
#with Mod. 2661 assembled

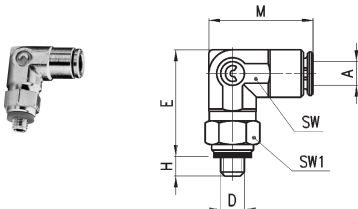


Mod.	A	D	H	F	G	L	SW1
#6522 - 3 -	M3	2.5	13.7	13.7	6	6	
*6522 - 3 -	M5	3.5	13.7	13.7	6	8	

with Mod. 2661 assembled

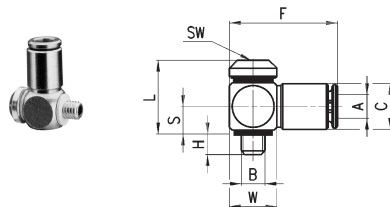


Mod.	A	B	H	C	F	L	S	W	SW
6621 - 3 -	M3	2.5	5.8	14.2	9.3	3.5	6	1.5	
6621 - 3 -	M5	3.2	6.5	16	11.9	4.8	8	2	

*with O-Ring assembled
#with Mod. 2661 assembled

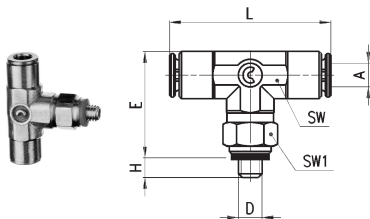


Mod.	A	D	H	E	L	SW	SW1
#6432 - 3 -	M3	2.5	13.7	21.4	6	6	
*6432 - 3 -	M5	3.2	14	21.4	6	8	

*with O-Ring assembled
#with Mod. 2661 assembled

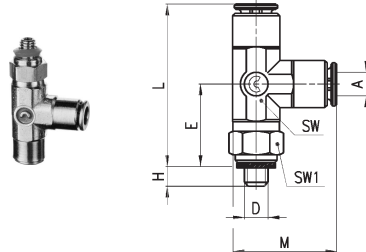


Mod.	A	D	H	F	L	M	SW	SW1
#6442 - 3 -	M3	2.5	10.7	21.4	13.7	6	6	
*6442 - 3 -	M5	3.2	11	21.7	13.7	6	8	

*with O-Ring assembled
#with Mod. 2661 assembled

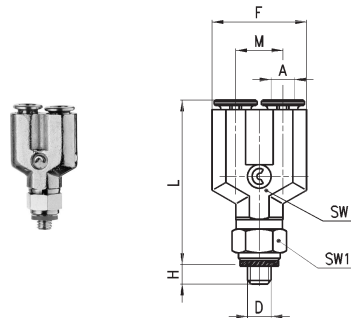

Mod.	A	D	H	F	L	M	SW	SW1
#6452 - 3 -	M3	2.5	12	20.9	6	6	6	
*6452 - 3 -	M5	3.2	12	21.2	6	6	8	

The company reserves the right to vary odels and dimensions without notice.
These products are designed for industrial applications and are not suitable for sale to the general public.



Mod.	A	G	L	S
6580	3	5.8	19.9	2.2



Mod.	A	M	SW
6550	3	13.7	6



Mod.	A	L	M	SW
6540	3	21.4	13.7	6



Mod.	A	B	F	L	MAX	T
6590	3	M7 x 0.75	5.8	18.4	5	11.4



* Metallic seat +0.05 Synthetic seat +0.03 - 0.02

Mod.	A	F	G	H	L	S	B
6700	3	5.9	6.2	6.3	9.2	6	2



Mod.	A	F	L	M	SW
6560	3	12	20.4	6	6



Mod.	A	G	F	L	T
6800	3	4	5.8	26	16.5



plastic

Mod.	G	L	P	T
6900	3	20.5	5	10.5