

Pipe fittings and tubing

Connections M5 - G1/8 - G1/4 - G3/8 - G1/2 - G3/4
Tube od 4/2, 5/3, 6/4, 8/6, 10/8, 12/10, 14/12, 15/12,5




When involved in factory maintenance or plant installation it is often difficult to be certain which size of fitting will be required.

the camozzi pipe fitting range provides a cost effective solution to this problem. The full range includes straight, L-shaped, T-shaped and cross piece male or female couplings and are available in a variety of thread sizes up to G1/2.


Material: brass OT58 (nickel-plated).




7




Mod.	A	H	L	SW
2500 - 1/8	7.5	19.5	12	
2500 - 1/4	11	27	14	
2500 - 3/8	11.5	28	17	
2500 - 1/2	14	33.5	22	
2500 - 3/4	16.5	40	27	




Mod.	A	H	L	SW
2501 - M5	4	11.5	8	
2501 - 1/8	6	16.5	14	
2501 - 1/4	8	21	17	
2501 - 3/8	9	23	19	
2501 - 1/2	10	25.5	24	




Mod.	A1	A2	H1	H2	L	SW
2510 - 1/8 - 1/4	7.5	11	23.5	14		
2510 - 1/8 - 3/8	7.5	11.5	24	17		
2510 - 1/4 - 3/8	11	11.5	27.5	17		
2510 - 1/4 - 1/2	11	14	30.5	22		
2510 - 3/8 - 1/2	11.5	14	31	22		
2510 - 1/2 - 3/4	14	16.5	37.5	27		




Mod.	A1	A2	H1	H2	L	SW
2511 - M5 - 1/8	4	6	14.5	14		
2511 - 1/8 - 1/4	6	8	19	17		
2511 - 1/8 - 3/8	6	9	20	19		
2511 - 1/4 - 3/8	8	9	22	19		
2511 - 1/4 - 1/2	8	10	23.5	24		
2511 - 3/8 - 1/2	9	10	24.5	24		




Mod.	A	B	H	L	SW
2520 - 1/8 - 1/8	7.5	17.5	14		
2520 - 1/8 - 1/4	7.5	21.5	17		
2520 - 1/8 - 3/8	7.5	22	22		
2520 - 1/4 - 1/4	11	25	17		
2520 - 1/4 - 3/8	11	25.5	22		
2520 - 1/4 - 1/2	11	29	27		
2520 - 3/8 - 3/8	11.5	26	22		
2520 - 3/8 - 1/2	11.5	29.5	27		




Mod.	A	B	H	L	SW
2521 - M5 - 1/8	4	14	14		
2521 - 1/8 - 1/8	6	16	14		
2521 - 1/8 - 1/4	6	20	17		
2521 - 1/8 - 3/8	6	20.5	22		
2521 - 1/4 - 1/4	8	22	17		
2521 - 1/4 - 3/8	8	22.5	22		
2521 - 1/4 - 1/2	8	26	27		
2521 - 3/8 - 3/8	9	23.5	22		
2521 - 3/8 - 1/2	9	27	27		
2521 - 1/2 - 1/2	10	28	27		




Mod.	A	B	H	L	SW	SW1
2541	- 1/8 -	1/8	5.5	26.5	14	12
2541	- 1/4 -	1/4	7	32.7	17	14
2541	- 3/8 -	3/8	8	34.5	22	19




Mod.	A	B	H	I	L	SW
2525	- 1/8 -	1/8 -	16	6	16	22
2525	- 1/8 -	1/8 -	36	6	36	42
2525	- 1/4 -	1/4 -	27	8	27	35
2525	- 1/4 -	1/4 -	43	8	43	51




Mod.	A	B	H	L	SW
2530	- 1/4 -	1/8	11	16	14
2530	- 3/8 -	1/8	11.5	16.5	17
2530	- 1/2 -	1/8	14	19.5	22
2530	- 3/8 -	1/4	11.5	16.5	17
2530	- 1/2 -	1/4	14	19.5	22
2530	- 1/2 -	3/8	14	19.5	22
2530	- 3/4 -	1/2	16.5	23.5	27




Mod.	A	B	H	L	SW
2531	- 1/8 -	M5	6	10.5	14
2531	- 1/4 -	1/8	8	13	17
2531	- 3/8 -	1/8	9	14	19
2531	- 1/2 -	1/8	10	15.5	24
2531	- 3/8 -	1/4	9	14	19
2531	- 1/2 -	1/4	10	15.5	24
2531	- 1/2 -	3/8	10	15.5	24




Mod.	B	L	SW
2543	- M5	11	8
2543	- 1/8	15	14
2543	- 1/4	22	17
2543	- 3/8	24	22
2543	- 1/2	30	27




Mod.	B1	B2	L	SW
2553	- M5 -	1/8	13	14
2553	- 1/8 -	1/4	19.5	17
2553	- 1/8 -	3/8	20	22
2553	- 1/8 -	1/2	23.5	27
2553	- 1/4 -	3/8	23	22
2553	- 1/4 -	1/2	27	27
2553	- 3/8 -	1/2	27.5	27




Mod.	A	H	L	SW
2611	- M5	4	7.5	8
2611	- 1/8	6	10.5	14
2611	- 1/4	8	13	17
2611	- 3/8	9	14	19
2611	- 1/2	10	15.5	24




Mod.	A	H	L	SW
2610	- 3/4	16.5	23	27




Mod.	B	L	SW
2613	- 1/8	11	12
2613	- 1/4	19	14
2613	- 3/8	20	17
2613	- 1/2	24	19




Mod.	N	A	C	H	I	L	SW
2601	- 2 -	M5	1.2	4	8	16	8
2601	- 4 -	M5	2.5	4	15	23	8
2601	- 7 -	1/8	4	6	20	30	12
2601	- 7 -	1/4	4	8	20	33	17
2601	- 8 -	1/8	5	6	20	30	12
2601	- 9 -	1/8	5	6	20	30	12
2601	- 9 -	1/4	6	8	20	33	17
2601	- 9 -	3/8	6	9	20	34	19
2601	- 12 -	1/4	9	8	20	33	17
2601	- 12 -	3/8	9	9	20	34	19
2601	- 12 -	1/2	9	10	20	35.5	24
2601	- 17 -	3/8	13	9	24	38	19
2601	- 17 -	1/2	13	10	24	39.5	24

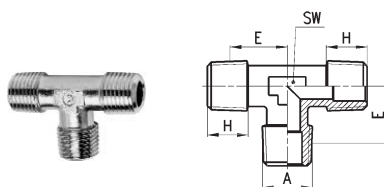


Mod.	A	E	H	SW
2080	- 1/8	14	7.5	9
2080	- 1/4	15.5	11	12
2080	- 3/8	19.5	11.5	14
2080	- 1/2	21.5	14	16

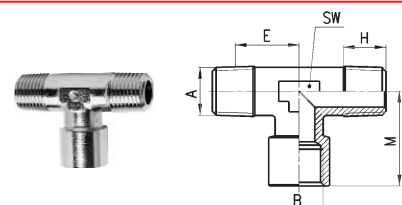


Mod.	A	B	E	H	M	SW
2090	- 1/8 -	1/8	14	8.5	21	12
2090	- 1/4 -	1/4	15.5	11	25.5	14
2090	- 3/8 -	3/8	19.5	11.5	28	16
2090	- 1/2 -	1/2	21.5	14	33	21

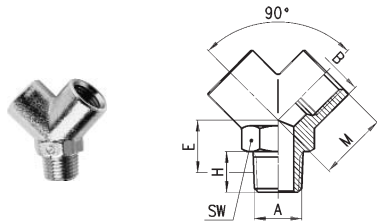


Mod.	A	B	H	E	M	SW
2040 - 1/8 - 1/8	8.5	13	17.5	14		
2040 - 1/4 - 1/4	11	13	18.5	17		
2040 - 3/8 - 3/8	12	18	22.5	22		
2040 - 1/2 - 1/2	15.5	22.5	28	26		

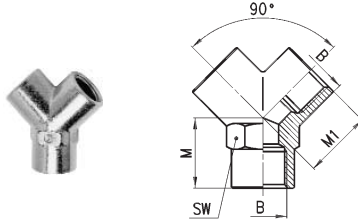


Mod.	B	M	M1	SW
2043 - 1/8	17.5	17.5	14	
2043 - 1/4	19	18.5	17	
2043 - 3/8	23.5	22.5	22	
2043 - 1/2	28	28	26	

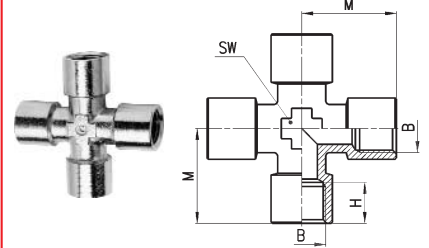


Mod.	B	H	M	SW
2033 - 1/8	7.5	21	12	
2033 - 1/4	11	25.5	14	
2033 - 3/8	11.5	28	16	



Mod.	A	E	H	SW
2010 - 1/8	14	7.5	9	
2010 - 1/4	15.5	11	12	
2010 - 3/8	19.5	11.5	14	
2010 - 1/2	21.5	14	16	




Mod.	B	M	SW
2013 - 1/8	21	12	
2013 - 1/4	25.5	14	
2013 - 3/8	28	16	
2013 - 1/2	33	21	

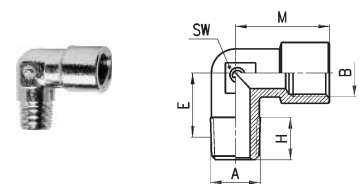


Mod.	A	B	E	H	M	SW
2021 - M5 - M5	9	4	10.5	9		
2020 - 1/8 - 1/8	15	7.5	21	12		
2020 - 1/4 - 1/4	19	11	25.5	14		
2020 - 3/8 - 3/8	19.5	11.5	28	16		
2020 - 1/2 - 1/2	23	14	33	21		


- * assembly required with Mod. 1635
- assembly possible only with Mod. SCU, SCO, SVU...M5

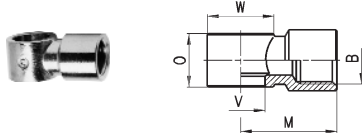


Mod.	B	M	O	V	W
2023 - M5 - M5	10.5	9	5.1	9	
2023 - M5 - M6	10.5	9	6.1	9	
2023 - 1/8 - 1/8	21	14.5	9.8	14	
2023 - 1/4 - 1/4	26	14.5	13.2	18	
2023 - 3/8 - 3/8	29	14.5	16.7	21	

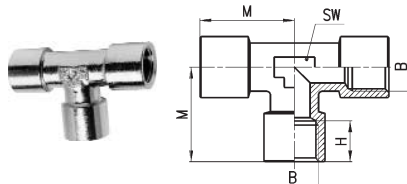


Mod.	B	H	M	SW
2003 - 1/8	7.5	21	12	
2003 - 1/4	11	25.5	14	
2003 - 3/8	11.5	28	16	
2003 - 1/2	15	33	21	

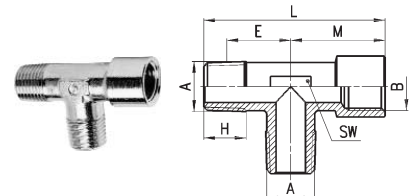


Mod.	A	B	E	H	L	M	SW
2050 - 1/8 - 1/8	15	8.5	39	21	12		
2050 - 1/4 - 1/4	19	11	49	25.5	14		
2050 - 3/8 - 3/8	19.5	11.5	52.5	28	16		
2050 - 1/2 - 1/2	23	14	63	33	21		

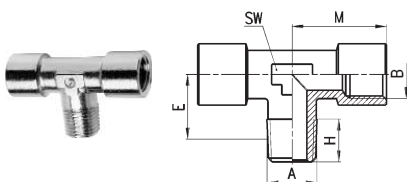

Mod.	A	B	E	H	M	SW
2060 - 1/8 - 1/8	15	8.5	21	12		
2060 - 1/4 - 1/4	19	11	25.5	14		
2060 - 3/8 - 3/8	19.5	11.5	28	16		
2060 - 1/2 - 1/2	23	14	33	21		

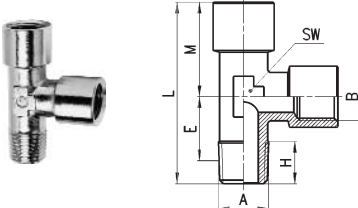

Mod.	A	B	E	H	L	M	SW
2070 - 1/8 - 1/8	15	8.5	39	21	12		
2070 - 1/4 - 1/4	19	11	49	25.5	14		
2070 - 3/8 - 3/8	19.5	11.5	52.5	28	16		
2070 - 1/2 - 1/2	23	14	63	33	21		



Mod.	B	C	F	L	T	SW
3033 - 1/8	4	4.5	25	17	16	
3033 - 1/4	7	5.5	40	26	20	
3033 - 3/8	8	5.5	50	34	26	
3033 - 1/2	8	5.5	50	34	32	



Tubing (PVC reinforced) (blue)

Mod.	D/d	Operating pressure at 30°C
PV	- 6/4	25
PV	- 8/6	25
PV	- 10/8	25
PV	- 12/10	25
PV	- 15/12.5	25



Tubing (Rilsan) (* available on request)

Mod.	D/d	Operating pressure at 20°C
TRN	- 4 x 2	33 bar
TRN	- 5 x 3	25 bar
TRN	- 6 x 4	20 bar
TRN	- 8 x 6	14 bar
TRN	- 10 x 8	11 bar
TRN	- 12 x 10	9 bar

Natural
* Blue
* Red
* Green
* Black
* Yellow




Tubing (Polyethylene) plain, blue

Mod.	D/d	Operating pressure at 20°C
TPE	- 5 x 3	12 bar
TPE	- 6 x 4	11 bar
TPE	- 8 x 6	8 bar
TPE	- 10 x 8	7 bar



Coil (Rilsan) (blue) (other colours available on request)

Mod.	D/d	P. at 20°C	ø est.	L. compr.	L. ext.
TSP	- 6 x 4	20 bar	50	820	15
TSP	- 8 x 6	14 bar	64	1000	15
TSP	- 10 x 8	11 bar	86	1000	15
TSP	- 12 x 10	9 bar	114	1050	15



Tube clamp (blue)

Mod.	ø tubo	L	A	d	P
MPL - 4	4 x 2	115	19	2.5	11.5
MPL - 6	6 x 4	115	19	2.5	11.5
MPL - 8	8 x 6	144	19	3.5	14.5
MPL - 10	10 x 8	172	19	4.5	17.5



Mod. **PNZ - 12** (tube cutter)
Mod. **PNZ - 25**



Hose reel for compressed air

Mod. SAC-200, SAC-201, SAC-210, SAC-211


General data

type of construction	compact, light weight
operation	fully automatic hose rewind with latching or free run facility
materials	steel bracket, other components in plastic, tube PU
	nickel-plated brass fittings
type of mounting	wall or overhead bracket

Pneumatic data

operating pressure	Ø 6 P. max 10 bar - Ø 8 P. max 8 bar - Ø 10 P. max 6 bar at 20°
nominal tube diameter	SAC-200 ø 6, SAC-201 ø 8, SAC-210 ø 8, SAC-211 ø 10
tube length	SAC-200 2-8 metres, SAC-201 2-7 metres, SAC-210 2-10 metres, SAC-211 2-8 metres

SAC - 210
SAC - 211

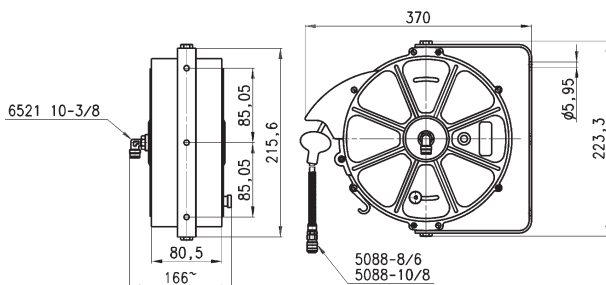

SAC - 200
SAC - 201

